

UV PROTECTION

UVA 151

INTERNAL APPLICATION




Transparent film

REDUCES GRAYING OF YOUR WINDOW DISPLAY

This transparent film was designed to be applied on shop fronts without being visible. It slows UVA to avoid graying of your window displays and some diseases linked to UVA.

INFORMATION

UV BLOCKING:	99%
MATERIAL:	PET 36 microns
ADHESIVE:	Acrylic Polymer
LINER:	Siliconed pet 23 microns
APPLICATION FACE:	Internal
COLOR:	Transparent
APPLICATION T°:	min, + 5°C
FIRE RATING:	B-S1, D0
STANDARDS:	EUROCLASSES
GUARANTEE:	10 years
WIDTH:	1,52 m
LENGTH:	2,5 / 5 / 10 / 30 m

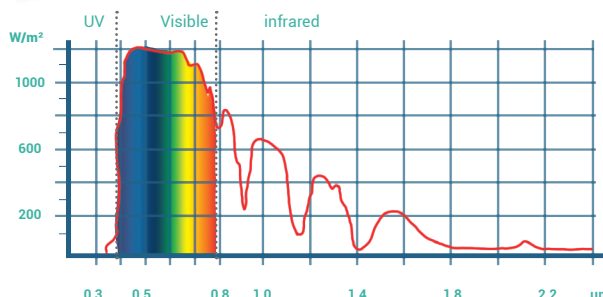

Durability: from 12 to 15 years for vertical application in central Europe



Use: Réfectiv window films are designed for use on any type of clear normal glass



Maintenance after 30 days: with usual cleaning solutions (non-abrasive, without ammonia...). Cleaning products that may scratch the film should be avoided.



Stockage: 2 years from delivery. This film should be kept away from excessive humidity and sun rays, at temperatures below 38°C.

To meet high levels of requirements, we do not recommend to mix different production batches.

Application method

The glass surface to be glued on has to be free from dust, grease or other contaminants. Some specific materials such as polycarbonate can cause air bubble problems. Therefore, a compatibility test is recommended. For more precision we recommend to refer back to the application table.

Production and standards

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice.

Before applying our products we recommend that our users ensure that the film is suitable for the intended use and comply

Application method

