


LG Hausys

sign & graphic materials

LP5912

Polymeric Protective Laminate

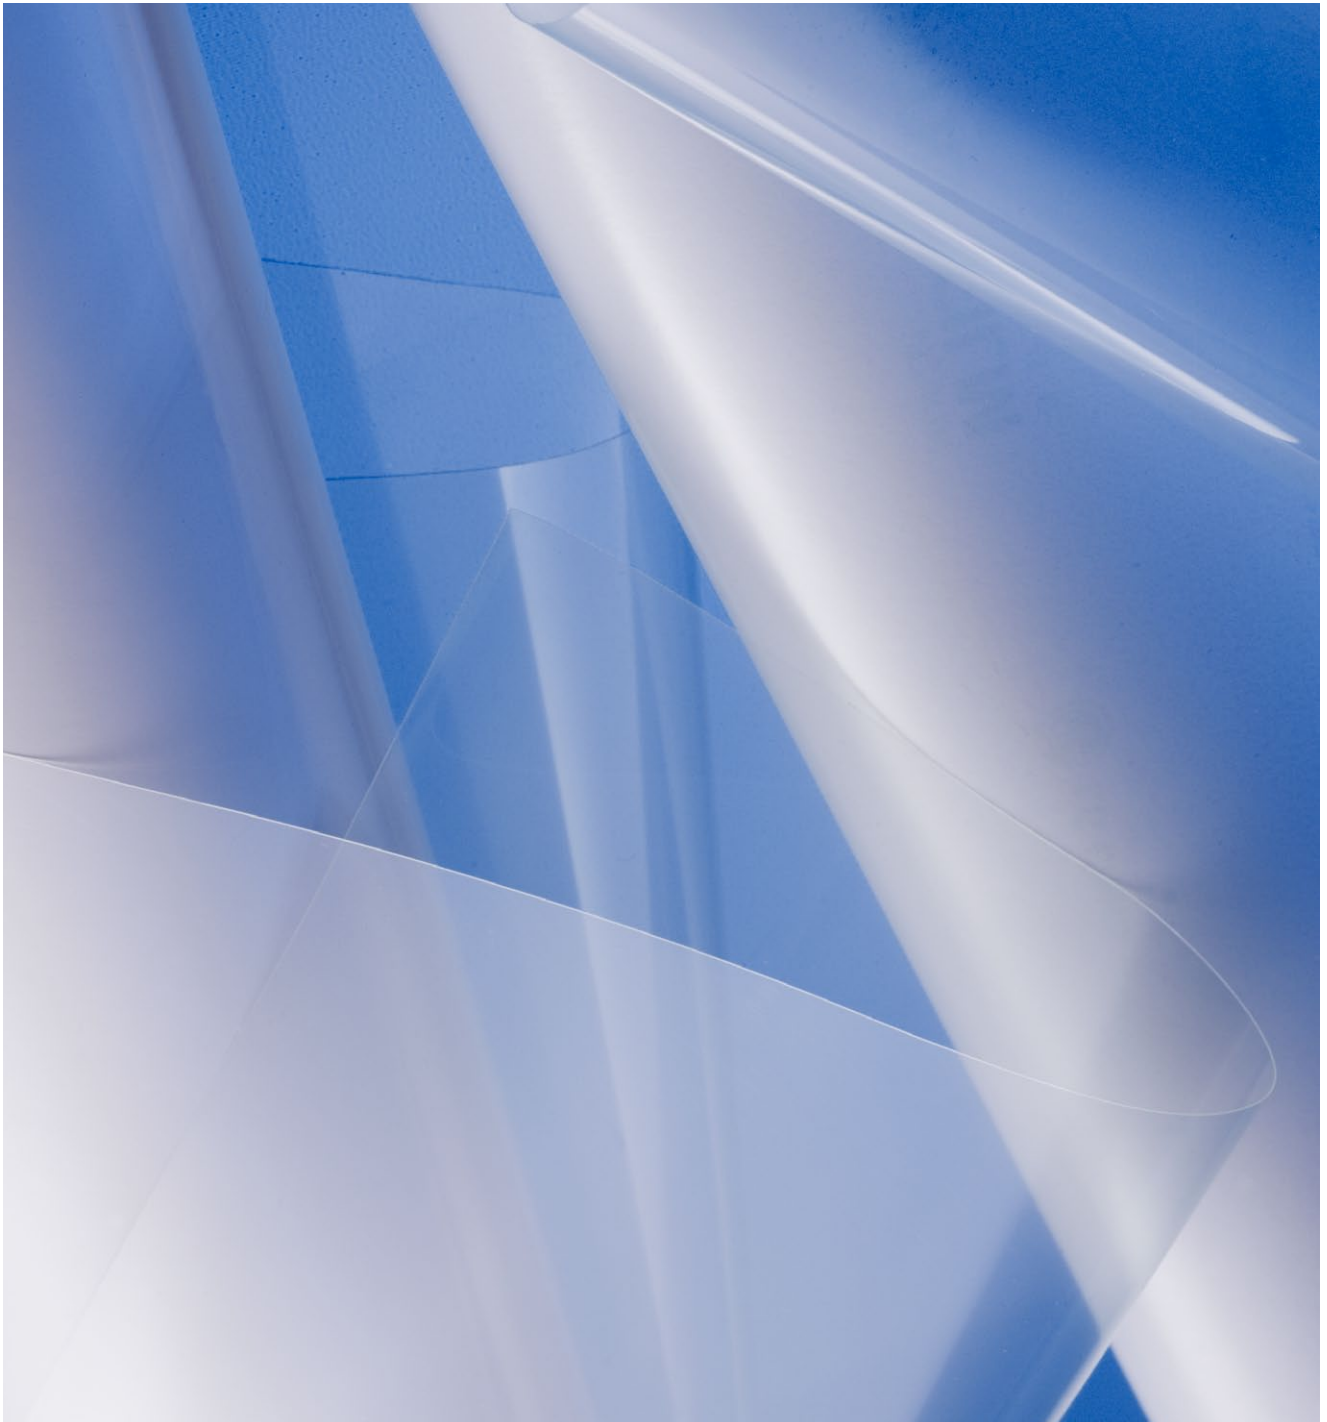

Dated: 4.2014

LG Hausys

sign & graphic materials

LP5912

Polymeric Protective Laminate

Production	Electro cut, hand cut, kiss cut, die cut
Application Period	Medium term applications
Colors	Transparent
Adhesive	Pressure sensitive, transparent, permanent, acrylic based.
Film Coat	PVC
Surface	Glossy
Production Process	Polymeric calendered
Thickness	0.05 mm
Service Temperature Range	-25 °C – +82 °C
Application Temperature	Minimum +10 °C
Durability	5 years
Removability	Permanent
Compatible Products	Compatible with the base film LD593T.



LG Hausys Europe GmbH
Lyoner Straße 15, ATRICOM C6
60528 Frankfurt am Main
Germany
Phone: 0049 69-58 30 29 441
Fax: 0049 69-66 11 35 06
Email: sign@lghausys.eu
Web: <http://sign.lghausys.eu>