

For further information on the wide range of Polycasa products please contact us as follows;

UK and Ireland

T: 00 44 28 67 74 11 11

France, Italy, Greece and Cyprus

T: 00 32 14 57 67 11

Germany, Austria, Switzerland

T: 00 49 61 31 63 11 82

Spain and Portugal

T: 00 34 93 565 12 30

Central and Eastern Europe

T: 00 421 41 707 14 20 – 24

Benelux, Scandinavia and all other countries

T: 00 32 14 57 67 11

HEAD OFFICE

Polycasa

Van Doornelaan 2a

BE 2440 Geel

Belgium

T: 00 32 14 57 67 11

F: 00 32 14 58 96 21

E: info@polycasa.com

W: www.polycasa.com

Polycasa offers an extensive range of plastic sheets to distribution and industrial partners, with an industry leading selection of polymers, thicknesses, sizes, colours, patterns, and coatings.



Brands from Polycasa:



Product Guide




While we have made every effort to ensure the accuracy of the information it is provided on an "as is" basis and without liability, particularly including (but not limited to) liability with regard to any up to date status, completeness or correctness of the information or any liability for the merchantability of products, their fitness for any particular purpose, or the infringement of third party rights. Colours of the products are for indication purposes only and may not represent the colour of the actual product. Any opinions provided in the Product Guide are not statements or representations of fact and they are not intended to form part of any offer or contract. © Polycasa Group, 2013, all rights reserved.

AKRYLON XT IS OUR MOST WIDELY USED SHEET AND IS PERFECT FOR RETAIL, MAGAZINE SHELVING AND LIGHTING CONTROLLERS.

With sparkling clarity and the ability to be formed into shapes that blend into a store layout, you hardly notice it: the material does its job without distracting from the products being displayed.

And when used in the sign industry, Polycasa® Akrylon XT provides long lasting UV resistant signs — so your products get the promotion they deserve.

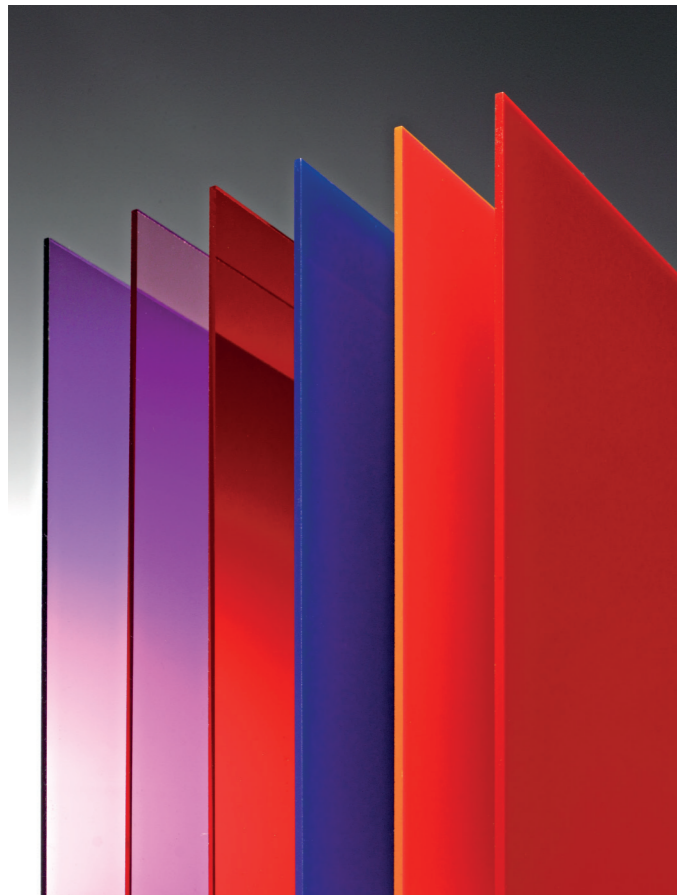

PRODUCT IDENTIFICATION

Akrylon XT is one of the trade names of Polycasa for extruded acrylic (polymethylmethacrylate PMMA) in the form of large dimensional sheets.

The material is thermoplastic and suitable for forming, bending or direct use in the form of cut-to-size panels.

CHARACTERISTICS

- Good optical properties — brilliant transparency showing excellent colour.
- High-quality surfaces — very good weathering and ageing resistance.
- High surface stability/resistance — backed up with a ten year guarantee.
- Can be used in contact with foodstuffs.
- Good recyclability.

APPLICATIONS

- Construction components: light domes, partition walls, glazing, roofing, caravan windows.
- Lighting: coloured and opal diffusers.
- Engineering components: housings, machine covers.
- Advertising and decoration: letters, shop fittings, panels, Point Of Purchase displays.
- Highway construction: sound barrier walls.
- Other applications: containers, lettering templates, solariums UVT (UV-transmitting grade).

PRODUCT RANGE

- A palette of colours is available in opaque, opal, transparent and translucent.
- Standard range of thickness is from 1.8 to 15 mm.
- Special product: Akrylon XT UV transmitting.
- Special thicknesses, colours can be produced to order, subject to conditions.

Please contact your local customer service centre for a complete product overview. For details see back of brochure.

TECHNICAL INFORMATION

GENERAL			
Property	Method	Unit	AKRYLON XT
Density	EN ISO 1183	g/cm ³	1.19
OPTICAL			
Property	Method	Unit	AKRYLON XT
Light transmission (3mm)	EN ISO 13468-1	%	93
Refractive index	EN ISO 489	nD	1.492
Haze (AKRYLON XT clear)	ISO 14782	%	0.6
MECHANICAL			
Property	Method	Unit	AKRYLON XT
Tensile strength at break	EN ISO 527-2	MPa	70
Elongation at break	EN ISO 527-2	%	4
Tensile modulus	EN ISO 527-2	MPa	3200
Flexural strength	EN ISO 178	MPa	115
Ball indentation hardness	EN ISO 2039-1	N/mm ²	175
Impact strength - Charpy unnotched	EN ISO 179	kJ/m ²	17
Impact strength - Charpy notched	EN ISO 179	kJ/m ²	2
THERMAL			
Property	Method	Unit	AKRYLON XT
Vicat softening temperature (B 50)	EN ISO 306	°C	105
Temperature of deflection underload (A 1,8 MPa)	EN ISO 75	°C	95
Coefficient of linear expansion	DIN 53752	K ⁻¹	70x10 ⁻⁶
Degradation temperature		°C	>280
Combustibility grade	EN 13501-1		E
ELECTRICAL			
Property	Method	Unit	AKRYLON XT
Relative permittivity (50Hz)	DIN 53483-2		2.7
Relative permittivity (1 kHz)	DIN 53483-2		3.1
Relative permittivity (1 MHz)	DIN 53483-2		2.7
Dielectric strength	DIN 53481	kVmm	30
Electrical strength	IEC 60243-1	kVmm	10
Surface resistivity	IEC 60093	Ω	3x10 ¹⁵ -3x10 ¹⁶
Volume resistivity	IEC 60093	Ωxm	1x10 ¹³ -5x10 ¹³

