



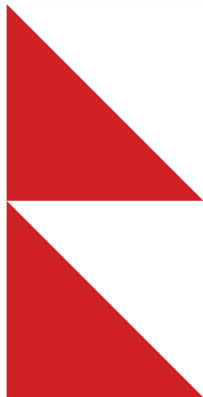

CWT 1640 Regular

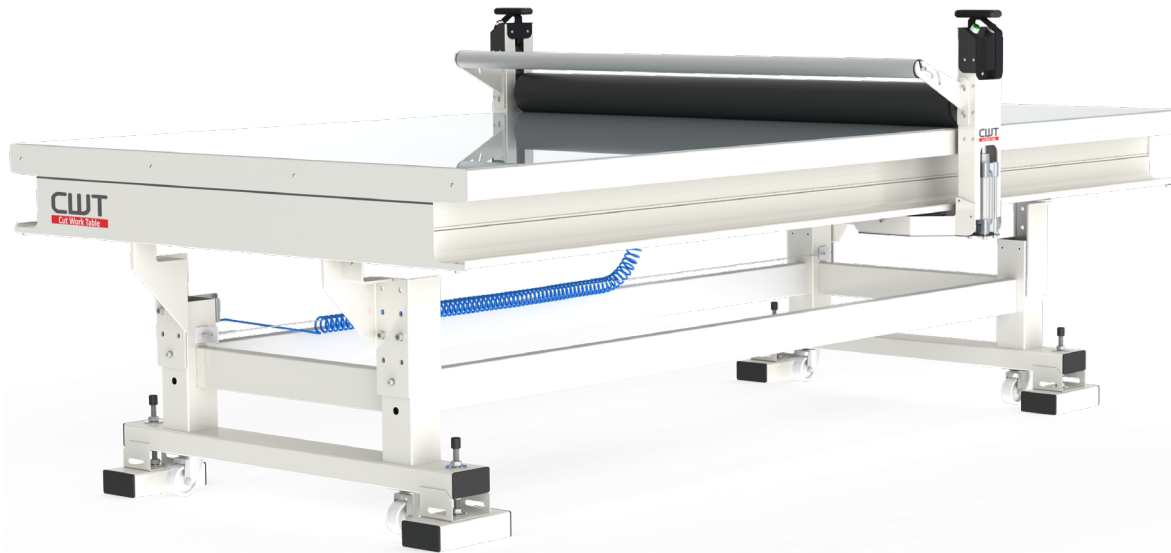

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 164010
CAPACITY UP TO	140 m ² /h (1500sq. ft./h)
TABLE LENGTH	4000mm (13ft. 1.4in.)
TABLE WIDTH	1600mm (5ft. 3in.)
LENGTH OF WORKING AREA	3560mm (11ft. 8in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1560mm (5ft. 1.5in.)
OVERALL WIDTH	1810mm (5ft. 11in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8in.)
WORK HEIGHT	776-944mm (2ft. 6.5in.-3ft. 1.1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A)/120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	500kg (1102lbs)
GROSS WEIGHT	655kg (1444lbs)
PACKING DIMENSIONS	4940x560x2100 mm (16ft. 2.4in. x 1.8ft. 10in. x 7ft. 1in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
ROLL HOLDER FOR GLIDE BEAM	Yes
LED ILLUMINATED LIGHT TABLE	Option
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEET	Yes
PREMIUM UPGRADE KIT ***	Option

* Select 1 of 4 fixed heights at installation.

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top

"FINISHING WHAT YOU STARTED"