
LG Hausys

sign & graphic materials

LD2800/LD2840

Monomeric Digital Print Vinyl

Protective Laminates LP2712, LP3812, LP3842

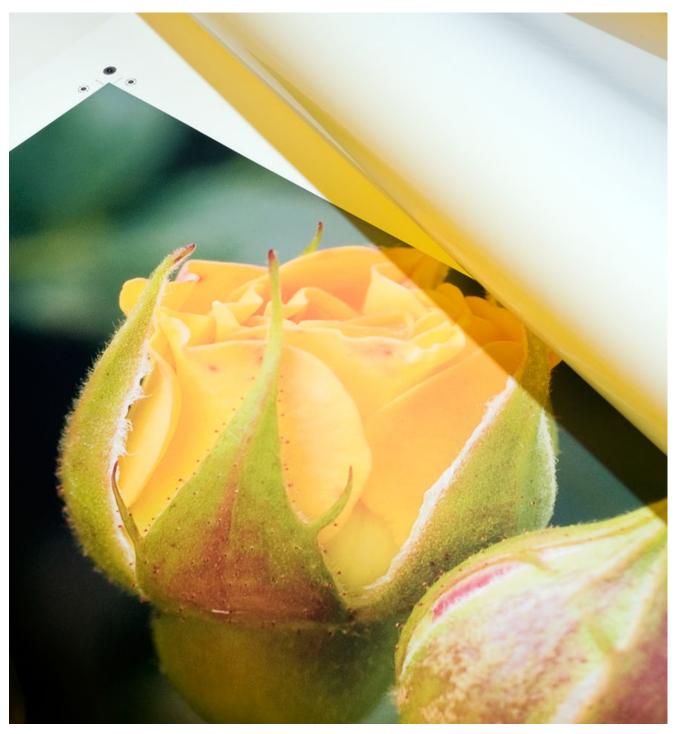

Dated: 7.2012



LG Hausys sign & graphic materials LD2800/LD2840

Monomeric Digital Print Vinyl

Туре	LD2800	LD2840
Production	Piezo Ink Jet	
Application Period	Short term applications	
Areas of Use	Indoor and outdoor advertising, flat and even surfaces for exhibition booths or other promotions.	
Colors	White glossy, white matt	
Adhesive	Pressure sensitive, transparent, acrylic based.	Pressure sensitive, transparent, acrylic based, removable.
ICC Profiles	Seiko: Colorpainter Roland: VersaCamm/SolJet Pro II Mutoh: Value Jet/Toucan LT/Falcon/Falcon II Mimaki: JV3 HP: 9000 Download ICC profiles under: http://sign.lghausys.eu/en/ld2800 We constantly update our available ICC profiles. Should you have further questions please visit our website.	
Film Coat	PVC	
Production Process	Monomeric calendered	
Thickness	0.10 mm	
Service Temperature Range	-45 °C – +82 °C	
Application Temperature	Minimum +10 °C	
Durability	2 years	
Removability	Permanent	Removable without adhesive residue.
Protective Laminate	LP2712, LP3812, LP3842	



LG Hausys Europe GmbH

Lyoner Straße 15, ATRICOM C6 60528 Frankfurt am Main

Germany Phone: 0049 69 - 58 30 29 441 Fax: 0049 69-66 11 35 06 Email: sign@lghausys.eu Web: http://sign.lghausys.eu/en