Vivid Vision Film(LW01SPM)



Applications








Indoor Vivid Effect

Structure

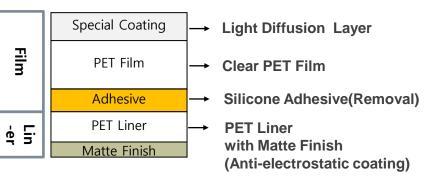

Concept

- Specially Designed Backlit Film (Maximized Light Diffusion Effect)
- Brighter Image with Strong Visibility
- Easy Installation & Easy Removability by Silicone Removal Adhesive
- No required Sky Crane by indoor Installations
 (Save Cost & Time, Ensure Safety)

Spec & Features

• Base Material : Polyester

• Thickness: 140µm (with adhesive)

• Width: 1270/1370/1520mm

 Durability: Short term Use (Less than 1 year)

 Excellent printing performance (Latex, UV)

Characteristic


Property	Unit
Base Film	PET
Thickness(with PSA)	100 <i>μ</i> m
Tensile strength	≥ 3.0kg/cm²
Elongation	≤ 10%
Adhesion (24hrs, SUS)	≤ 300g/in

Vivid Vision Film(LW01SPM)



Additional Applications

Day Off Advertisement (Value Added)





Indoor Advertisement

